



## Series AII & AIIe

### Barton Electronic Transmitters



A single silicon crystal etched to exacting standards is at the core of Barton's latest generation of electronic transmitters. This micro capacitance sensor negates the effects of hysteresis and long term fatigue. Approved by various international regulatory agencies, the FCX AII and AIIe Series transmitters are intrinsically safe and explosion proof. From sealed sensing systems to high powered RTUs - for every application from natural gas to cryogenic liquids - the FCX measures, displays, alarms and outputs level, pressure and/or flow. Whether the requirement demands standard or high performance accuracy, the FCX provides years of trouble free service resulting in the ultimate control of both the process and long term maintenance costs.

#### FCX AII Series

- Premium performance
- Gauge, absolute, differential pressure, flanged level, remote seal
- Turndown to 100:1
- HART compatible with optional Foundation Fieldbus, Profibus
- Accuracy to  $\pm 0.07\%$  of span
- Stability to  $\pm 0.1\%$  URL for 3 years
- Response time to 40 mS

#### FCX AIIe Series

- Cost effective precision
- Gauge pressure, differential pressure
- Turndown of 30:1
- HART compatible
- Accuracy of  $\pm 0.1\%$  of span
- Stability of  $\pm 0.2\%$  URL for 3 years

- Compact
- Cost Effective
- Reduced Cost of Ownership
- Ideal for:
  - Oil/Gas
  - Power
  - Chemical
  - Water/Waste Water
  - General Industrial
  - Food/Beverage



#### Barton Instrument Systems, LLC

900 S. Turnbull Canyon Road  
City of Industry, CA 91745

**T** (626) 961-2547

**F** (626) 933-7241 (Sales)

**e** [info@barton-instruments.com](mailto:info@barton-instruments.com)

# A closer look at the FCX AII and AIIe Series

## Low Cost Ownership

Direct savings through:

- Interchangeable components
- Multiple stocking locations in the US, Canada and Europe
- Access to engineering specialists that can provide advice ranging from product applications to the specification of complete integrated measurement solutions


## Fieldbus Compatible

The FCX AII series transmitter is well prepared to meet the requirements of the digital age. As option to the standard HART and Fuji compliant electronics, the AII can be supplied with digital electronics to support both IEC Foundation Fieldbus and Profibus specifications.

Existing AII transmitters in the field can be upgraded at an affordable cost through a simple electronics replacement. With appropriate electronics installed, Fieldbus or Profibus protocols are switch selectable.

## Advanced Floating Cell Design

Barton's unique cell design incorporates an overrange protection diaphragm which isolates the sensor from adverse conditions present in normal process applications. Installed in the neck of the transmitter, the sensor is isolated from the effects of temperature extremes, mechanical vibration and overrange pressures.

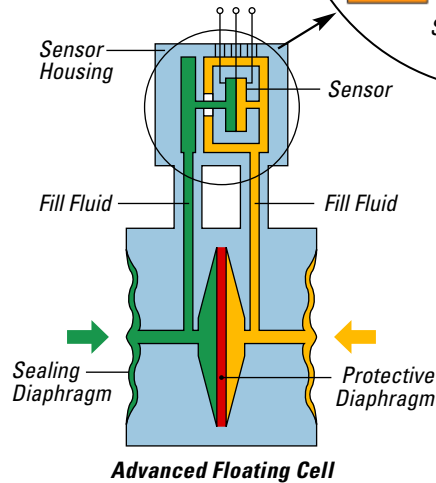

### Advanced Floating Cell Sensor


Fuji Electric introduced its unique 'floating cell' measuring principle in the early 1980s. Since then, more than 500,000 units have been put to service in a broad base of industrial applications.

## Hydroseal Diaphragm

A unique 316L SS diaphragm coated with a layer of gold and a layer of ceramic eliminates Hydrogen penetration. The Hydroseal option for the AII series transmitter reduces penetration to 1/160th of 316 SS and 1/1600th of Hastelloy C-276.

## Programmable Linearization

In addition to supporting both linear and square root outputs, the AII and AIIe can output a current signal proportional to the volume of cylindrical tanks. Up to 14 level versus volume points can be entered to the memory of the transmitter's electronics.

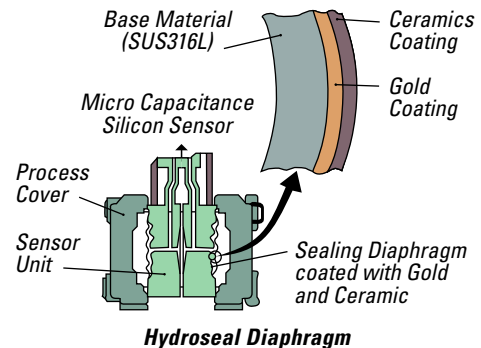

	Differential Pressure & Flow				Gauge Pressure		Absolute Pressure			Liquid Level		
	FKC				FKP		FKA			FKE		
Upper Range Limit	in. w.c. (psid)	mm w.c. (kPa)	mbar (bar)	psi	kPa (MPa)	bar	psi abs	kPa abs	bar abs	in. w.c. (psid)	kPa d	mbar d
Range: 1	4*	100	10	18	130	1.3	2.32*	16	0.16	125	32	320
2	24**	610	60	72	500	5	19***	130	1.3	520	130	1300
3	125	3175	320	435	3000	30	72	500	5	(72)	500	5000
4	520	(130)	(1.3)	1500	(10)	100	435	3000	30			
5	(72)	(500)	(5)	7000	(50)	500						
6	(435)	(3000)	(30)									
Safe Working Pressure	psi	kPa	bar	psi	mPa	bar	psi	kPa	bar			
	450	3200	32	145	1	10	72	500	5	Up to flange rating		
	1500	10000	100	215	1.5	15	72	500	5			
	2300	16000	160	1300	9	90	215	1500	15			
	6000	42000	420	2175	15	150	1300	9000	90			
				10000	75	750						
Elevation/Suppression	–100% to +100% (zero plus span not to exceed URL)											
Turn Down (Min. Span)	100 : 1	(1/100th of URL)										
	* 10 : 1	(1/10th of URL)										
	** 60 : 1	(1/60th of URL)										
	*** 80 : 1	(1/80th of URL)										
Accuracy	± 0.07% of calibrated span for up to 10 : 1 turndown typical (see data sheets for further detail)											
Sensor Temp Limit	–40° F to + 250° F (-40° C to + 120° C) for Silicone fill											
Electronics Temp Limit	–40° F to + 185° F (-40° C to + 85° C)											
Wetted Metallic Parts	316 (L) Stainless Steel, Hastelloy C276, Monel 400, Tantalum											
Power Supply	11 – 45 VDC											
Output Signal	4 – 20 mA											
Comm./Protocol	FCX or HART Protocol IEC Foundation Fieldbus and Profibus (Optional)											
Enclosure	IEC IP67 and NEMA 6/6P											
Hazardous Locations	Intrinsically safe and/or flameproof (explosion proof) per CSA, FM, RIIS, ATEX											
Options	Digital or analog indicator; lightning arrestor; stainless steel electronics housing; NACE specification; high temperature/high vacuum service; chlorine service; hydroseal diaphragm for corrosive service; tropicalization; material certification; process adapters											

# FCX Specifications

## FCX AIIe

The Alle series transmitter was designed to exceed the performance expectations of industrial process applications where economics is a key purchasing consideration. Offered in the most popular ranges and 316 stainless steel materials, the Alle is an excellent choice for applications that require cost effective yet precision measurement.

	Differential Pressure & Flow FHC			Gauge Pressure FHG		
	in. w.c. (psid)	mm w.c. (kPad)	mbar (bar)	psi	kPa	bar
<b>Upper Range Limit</b>	125	3175	320	72	500	5
	520	13200	1300	435	3000	30
	(72)	(500)	(5)	1500	10000	100
<b>Safe Working Pressure</b>	psi	kPa	bar	psi	kPa	bar
	2300	16000	160	200	1500	15
				1300	9000	90
				2175	15000	150
<b>Elevation/Suppression</b>	-100% to +100% (zero plus span not to exceed URL)					
<b>Turn Down</b> (Min. Span)	30 : 1 (1/30th of URL)					
<b>Accuracy</b>	± 0.1% of calibrated span (up to 10:1 turndown) (see data sheets for further detail)					
<b>Sensor Temp Limit</b>	-40° F to + 250° F (-40° C to + 120° C) for silicone fill					
<b>Electronics Temp Limit</b>	-40° F to + 185° F (-40° C to + 85° C)					
<b>Wetted Metallic Parts</b>	316 Stainless Steel, 316L Stainless Steel					
<b>Power Supply</b>	11 – 45 VDC					
<b>Output Signal</b>	4 – 20 mA					
<b>Comm./Protocol</b>	FCX or HART Protocol					
<b>Enclosure</b>	IEC IP67 and NEMA 6/6P					
<b>Hazardous Locations</b>	Intrinsically safe and flameproof (explosion proof) per CSA, FM, RIIS, ATEX					
<b>Options</b>	Digital or analog indicator; lightning arrestor; stainless steel electronics housing; NACE specification; degreasing; tropicalization; material certification; process adapters					

# ...a cost effective, reliable, and high performance transmitter.

## Enhanced Electronics

Taking advantage of the latest technology in microelectronic design and manufacturing, custom ASIC's convert the capacitance changes of the sensor to a digital output. This new generation integrated circuit combines both digital and analog circuitry and was specifically designed to provide stable and accurate conversions to improve long term stability.


## Multiple Protocols

Both the All and Alle are intelligent transmitters communicating in both HART (Highway Addressable Remote Transceiver) and Fuji protocols. Full FSK communication is facilitated via either a universal 275 or Fuji HHT handheld.

A simple electronics upgrade in the field converts the standard All output to be compatible with both IEC Foundation Fieldbus and Profibus specifications.

## Fully Interchangeable


The transmitter electronics unit is fully interchangeable with any All or Alle series cell, irrespective of cell function or range. Configuration data is stored on separate EEPROMs, one in the sensor and the other in the transmitter electronics.

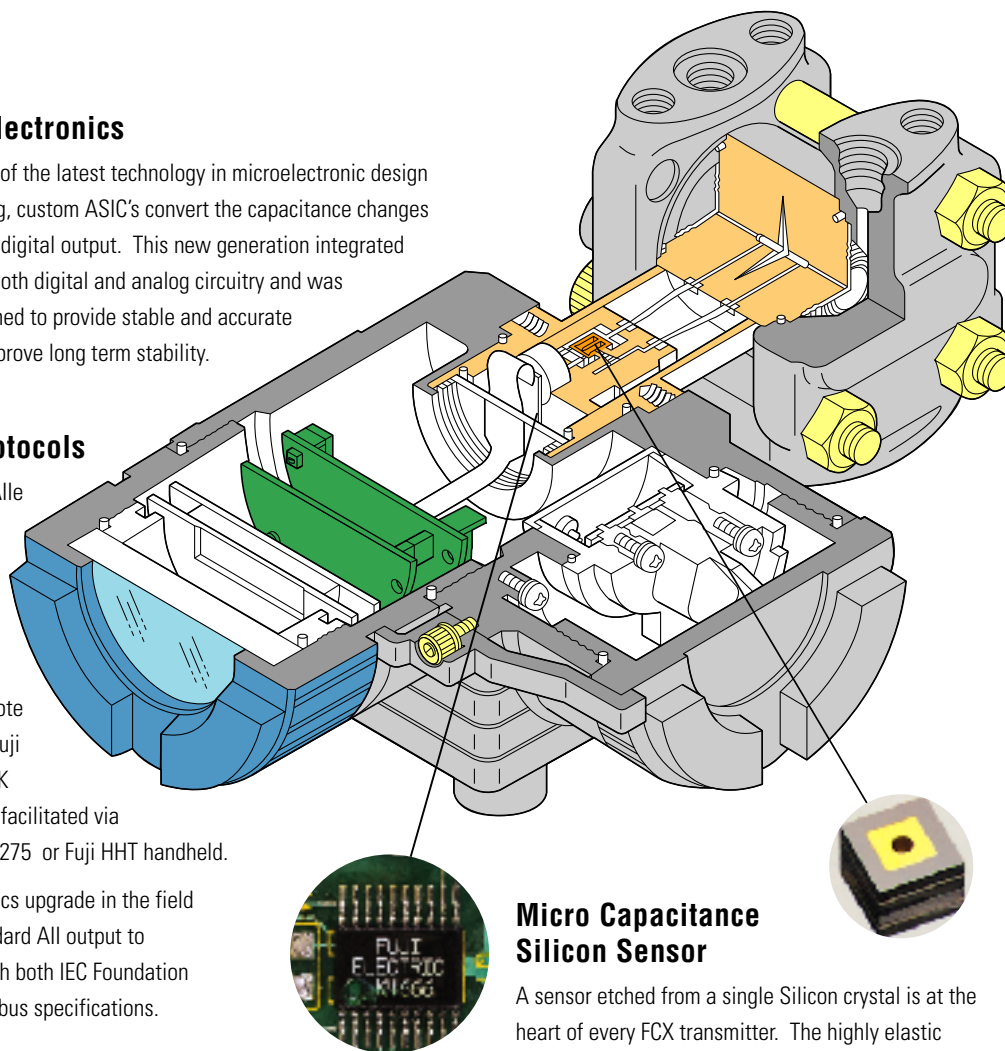

## Micro Capacitance Silicon Sensor

A sensor etched from a single Silicon crystal is at the heart of every FCX transmitter. The highly elastic property of Silicon virtually eliminates hysteresis in a

transducer that exhibits one quarter the fatigue of equivalent metal sensors. The single wafer construction technique results in repeatability of the manufacturing process and that translates directly to consistent, accurate and stable measurement performance. Hundreds of sensors are manufactured from each silicon wafer to ensure high yields, low manufacturing costs and practically no long term drift.

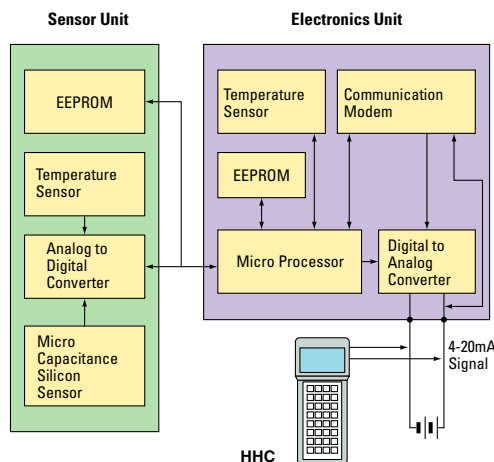

*These Barton products are represented in your area by:*

*Barton Instrument Systems designs, manufactures, sells and services precision instrumentation for the control and measurement of process variables including: pressure, level, flow, differential pressure, temperature and density. The technical and sales success of the FCX series of transmitters is the result of a long term strategic partnership between Barton and Fuji Electric. As the exclusive North American representative of Fuji transmitters, Barton is proud to offer this technically superior and cost competitive product line.*



**Barton Instrument Systems, LLC**

900 S. Turnbull Canyon Road  
City of Industry, CA 91745

**T** (626) 961-2547

**F** (626) 961-4452

**e** info@barton-instruments.com

**Sales Offices**

**Barton Instrument Systems, LLC**

City of Industry, California

T: (626) 336-4502

F: (626) 968-8907

e: industry@barton-instruments.com

Houston, Texas

T: (713) 682-1291

F: (713) 682-2018

e: houston@barton-instruments.com

Glenwood, Illinois

T: (708) 756-1472

F: (708) 756-0924

e: chicago@barton-instruments.com

Latin America

T: (626) 336-4502

F: (626) 968-8907

e: industry@barton-instruments.com

Singapore

T: (65) 737-0444

F: (65) 737-2344

e: fareast@barton-instruments.com

**Barton Instrument Systems Limited**

Bognor Regis, West Sussex, England

T: (44) 1243-826741

F: (44) 1243-860263

e: europe@barton-instruments.com

Dubai U.A.E.

T: (971) 4-288-2093

F: (971) 4-288-2092

e: europe@barton-instruments.com

**Barton Instrument Systems, Ltd.**

Calgary, Alberta, Canada

T: (403) 291-4814

F: (403) 291-5678

e: barton\_can@barton-canada.com

Edmonton, Alberta, Canada

T: (780) 468-2941

F: (780) 469-6043

e: barton\_can@barton-canada.com